

A Multi-spectral Spatial Convolution Approach of Rainfall Forecasting Using Weather Satellite Imagery

Chiang Wei^a, Wei-Chun Hung^b and Ke-Sheng Cheng^b

^a *Experimental Forest Administration, National Taiwan University, Nantou, Taiwan, ROC.*

^b *Department of Bioenvironmental Systems Engineering, National Taiwan University, Taipei, Taiwan, ROC.*

Abstract

Flood forecasting has long been a major topic of hydrologic research. Recent events and studies indicate that the success of flood forecasting in Taiwan depends heavily on the accuracy of real-time rainfall forecasting. In this study we demonstrate a multi-spectral spatial convolution approach for real-time rainfall forecasting using geostationary weather satellite images. The approach incorporates cloud-top temperatures of three infrared channels in a spatial convolution context. It not only characterizes the input-output relationship between cloud-top temperature and rainfall at the ground level, but also is more consistent with physical and remote sensing principles than single-pixel matches. Point rainfall measurements at raingauge sites are up-scaled to pixel-average-rainfall by block kriging, then related to multi-spectral cloud-top temperatures derived from Geostationary Meteorological Satellite (GMS) images by spatial convolution. The kernel function of the multispectral spatial convolution equation is solved by the least squares method. Through a cross-validation procedure, we demonstrate that the proposed approach is capable of achieving high accuracy for 1-hour to 3-hour-lead pixel-average-rainfall forecasting.

Keywords: rainfall forecasting, remote sensing, spatial convolution.

1. Introduction

Taiwan is located at the center of the western Pacific Rim and is particularly vulnerable to threat by typhoons. On average, there are 3.5 typhoons passing through Taiwan annually. Approximately 79% of these typhoons occur in the period from July to September. Typhoons often draw huge amounts and high intensity rainfall and may sometimes result in high casualties and severe property damage. For example, a ferocious typhoon Nari passed through and ravaged Northern Taiwan in September 2002. During its passage, more than 700mm of rainfall was recorded near the capital city Taipei. Overbank flood flow caused extensive inundation and tremendous property damage in the city.

The Water Resources Agency (WRA) has a flood forecasting and warning system in operation. The system comprises three major components: a rainfall forecasting system using weather radar, a hydrological rainfall-runoff model, and a three-dimensional inundation model. The three components work in series to yield a projected inundation map of the study area. Among the three components, rainfall forecasting is considered the most difficult, owing to high spatial and temporal variations of rainfall. Furthermore, the extremely rugged terrain in upstream mountainous areas, which causes beam blockage and ground clutter, often sabotage successful utilization of radar images for rainfall forecasting. In contrast, the weather satellite provides images of cloud-top temperature and water vapor, which are not affected by land surface features.

The success of flood forecasting in Taiwan depends heavily on accurate *real-time* rainfall forecasting since time-of-concentrations of major watersheds in Taiwan are relatively short (usually a few hours only) and flow at the watershed outlet quickly responds to rainfall in the upstream area. Unless accurate rainfall forecasts can be made, there will not be enough time to issue flood warnings and evacuate people who live in flood-prone areas. Therefore, the objective of this study is to develop a real-time rainfall forecasting approach which can be integrated into a flood forecasting system, using weather satellite imagery.

Estimation of rainfall using weather satellite images has a long history of nearly four decades. Thermal infrared images are most widely used for such applications (Scofield, 1987; Griffith et al.,

1978; Woodley et al., 1979; Negri and Adler, 1987; D'souza et al., 1990; Martin et al., 1990; Ba and Nicholson, 1998; Ba and Gruber, 2001; Mishra and Sharma, 2001). Techniques coupling multi-sensors images (for example, thermal infrared and space-borne microwave images) have also been developed (Kummerow and Giglio, 1995; Turk et al., 1998; Berg et al., 1999; Xu et al., 1999; Kazumasa and Liu., 2000; Prabhakara et al., 2000; Miller et al., 2001; Todd et al., 2001; Ferreira et al., 2001; Toshiaki et al., 2001). Since rainfall forecasting must be conducted in real-time, many multi-sensor techniques that utilize space-borne microwave images are not applicable and we develop a rainfall forecasting algorithm using only geostationary weather satellite images. It is also worthy to mention that if the space-borne microwave images are used only to calibrate the thermal infrared data, then the delay of the microwave data is not an issue in applying the combined IR/microwave algorithms in real time, unless other data such as rain gauge data are also considered. Examples of such algorithms include Turk et al. (1998) and Sooroshian et al. (2000).

2. Study area and data

The Danshui River watershed, which covers 2,700 km² drainage area in northern Taiwan, was selected for this study. It is composed of three major tributaries – the Hsindien River (900 km²), Dahan River (1,200 km²) and Keelung River (600 km²). Terrain elevation in the watershed ranges from near mean sea level at the outlet to over 3,500m in headwater mountainous area. Figure 1 shows the location and drainage systems of the Danshui River watershed. GMS images and hourly rainfall data from a network of 37 raingauge stations (see Figure 1) for 12 typhoon events with durations ranging from 10 to 57 hours (see Table 1) were collected. GMS has three thermal infrared channels (IR1 – IR3) and one panchromatic (PAN) channel. The spectral ranges and spatial resolutions of GMS images are shown in Table 2. Radiances received at the satellite sensors in the spectral range of IR1 and IR2 channels (10.5 – 12.5 μ m) are mainly emitted by clouds and are dependent on the cloud-top temperature. Radiances received at the sensors in the IR3 and PAN spectral ranges respectively characterize water vapor in the upper atmosphere and visible albedo of the cloud (Conway, 1997).

3. Methodology

Our methodology of real-time rainfall forecasting is composed of three major components: (1) estimation of pixel-average-rainfall (PAR) by block kriging, (2) forecasting of pixel-average-rainfall using weather satellite imagery by a multi-spectral spatial convolution (MSSC) approach, and (3) updating MSSC kernel function by Kalman filtering. Because of the page limit this paper presents only results of the first two components. Implementation of the Kalman filtering technique for MSSC kernel function update and real-time rainfall forecasting will be presented in a future paper.

3.1. Estimation of pixel-average-rainfall by block kriging

An important difference between rainfall measured by raingauges and estimated from GMS satellite images is their spatial scales, i.e. the spatial area over which rainfall amounts are collected. Rainfall measurements by raingauges are considered point measurements, whereas GMS estimates of rainfall rate are areal average (5km \times 5km) rainfall. Also, satellite cloud images are acquired instantaneously while rain gauges give accumulated amounts of rainfall that are discrete in time. This further complicates the efforts to relate the two. In order to establish a relationship between ground-based rainfall measurements and satellite-based rainfall estimates, we first discretized the study area into a grid mesh with 5-km intervals so that each grid cell corresponds to a pixel on GMS satellite images. Then, 1-hour and 3-hour cumulative pixel-average-rainfall (hereafter referred to as 1-hour-PAR and 3-hour-PAR) corresponding to raingauges were estimated by block kriging using point rainfall measured at 37 raingauges.

Consider point rainfall at location x as a random variable denoted by $Z(x)$ and spatial variation of point rainfall as a random field $\{Z_{\Omega}(x), x \in \Omega\}$ where Ω represents the spatial extent of rainfall

field. Rainfall measurements $\{z(x_i), i = 1, 2, \dots, n\}$ are observed by raingauges at locations x_i , $i = 1, 2, \dots, n$, and average rainfall within an area of V centered at x_0 , denoted by $z_V(x_0)$, can be estimated by a linear estimator

$$z_V^*(x_0) = \sum_{i=1}^n \lambda_i z(x_i) \quad (1)$$

Block kriging estimator $z_V^*(x_0)$ is a linear, unbiased estimator of $z_V(x_0)$ and has a minimum variance of estimation error. The following block kriging system of equations is used to solve the linear weights λ_i 's :

$$\begin{cases} \sum_{\beta=1}^n \lambda_{\beta} \gamma(x_{\alpha} - x_{\beta}) + \mu = \bar{\gamma}(V, x_{\alpha}) & (\alpha = 1, 2, \dots, n) \\ \sum_{\beta=1}^n \lambda_{\beta} = 1.0 \end{cases} \quad (2)$$

where μ is a Lagrange multiplier, $\bar{\gamma}(V, x_{\alpha}) = \frac{1}{V} \int_V \gamma(x, x_{\alpha}) dx$, and $\gamma(x_i, x_j)$ is the variogram of the

random field $Z_{\Omega}(x)$ and is defined as $\gamma(x_i, x_j) = \gamma(|x_i - x_j|) = \frac{1}{2} E\{[Z(x_i) - Z(x_j)]^2\}$.

Variogram is a function that characterizes the spatial variation structure of a random field and can be estimated using observed data $\{z(x_i), i = 1, 2, \dots, n\}$,

$$\hat{\gamma}(h) = \frac{1}{2 |N(h)|} \sum_{N(h)} [z(x_i) - z(x_j)]^2, \quad h > 0 \quad (3)$$

where $N(h) \equiv \{(x_i, x_j): |x_i - x_j| = h; i, j = 1, 2, \dots, n\}$. The function $\hat{\gamma}(h)$ is often termed the *experimental variogram*. For detailed descriptions of spatial estimation by block kriging readers are referred to Journel and Huijbregts (1978) and Chilès and Delfiner (1999).

3.2 Multi-spectral spatial convolution for pixel-average-rainfall forecasting

Both cloud-top temperature (CTT) observed by weather satellites and rainfall on the ground surface exhibit significant spatial and temporal variations and can be characterized using the concept of random fields. Let $T(x, y)$ and $R(x, y)$ respectively represent the random fields of cloud-top temperature and ground-surface rainfall at image location (x, y) . Transformation of cloud-top temperature to rainfall can be considered as a linear system with $T(x, y)$ and $R(x, y)$ being the input and output functions, respectively. The following equation of spatial convolution integral is introduced to relate the two random fields:

$$R(x, y) = \int_{x-\ell}^{x+\ell} \int_{y-\ell}^{y+\ell} T(x', y') f(x - x', y - y') dx' dy' \quad (4)$$

where the extent of convolution (also seen as the extent of influence by unit input) is $(2\ell+1)$ by $(2\ell+1)$, and f is the kernel function. The above integration equation only works for continuous random fields; however, both CTT and PAR are discrete random fields with $5\text{km} \times 5\text{km}$ support and the following discrete form of spatial convolution should be used:

$$R(x, y) = \sum_{x'=x-\ell}^{x+\ell} \sum_{y'=y-\ell}^{y+\ell} T(x', y') f(x - x', y - y') = \sum_{i=1}^N T(i; x, y) f(i; x, y) \quad N = (2\ell + 1)^2 \quad (5)$$

$R(x, y)$ represents pixel-average rainfall corresponding to a pixel at image location (x, y) . It is calculated by spatial convolution of cloud-top temperature of surrounding pixels $T(x', y')$ (nine pixels in our study using $\ell=1$ and $N=(2\ell+1)^2$.) In order to simplify the expression we adopt $T(i; x, y)$ to represent the cloud-top temperatures of nine pixels surrounding the central pixel at image location (x, y) . The index i is used merely to identify the i -th pixel ($i=1, 2, \dots, N$) surrounding the central pixel at image location (x, y) . Similarly, $f(i; x, y)$ is the value of kernel function assigned to the cloud-top

temperature of the i -th pixel surrounding the central pixel at (x,y) . The kernel function acts as a moving window of weights corresponding to cloud-top temperatures $T(x,y)$. The rationale of using spatial convolution equation is twofold (see Figure 2): (1) sensor onboard the satellite receives not only radiances from the target cloud pixel (path of solid line in Figure 2) but also atmospheric-scattered radiances from adjacent pixels (path of dashed line in Figure 2), and (2) precipitation within a cloud pixel may result in rainfall over an area at the ground level much larger than the corresponding ground cell. Another reason to use spatial convolution is that there may be errors in the navigation of the satellite data, or displacements between the cloud tops and the associated precipitation at ground level due to wind shear. Both processes can be characterized by point-spread-functions.

Suppose that there are n pixel-average rainfall in the study area, we then establish n spatial convolution equations and form the following matrix equation:

$$\begin{bmatrix} R(1) \\ R(2) \\ \vdots \\ R(n) \end{bmatrix} = \begin{bmatrix} T(1,1) & T(1,2) & \cdots & T(1,N) \\ T(2,1) & T(2,2) & \cdots & T(2,N) \\ \vdots & \vdots & \ddots & \vdots \\ T(n,1) & T(n,2) & \cdots & T(n,N) \end{bmatrix} \begin{bmatrix} f(1) \\ f(2) \\ \vdots \\ f(N) \end{bmatrix} \quad (6)$$

Or, $\underline{R} = \underline{T} \cdot \underline{F}$. $T(j,i)$ ($j = 1, \dots, n; i = 1, \dots, N$) in Eq. (6) represents the cloud-top temperature of the i -th surrounding pixel associated with the j -th pixel-average rainfall ($R(j)$). The kernel function \underline{F} can be solved by the least-squared method

$$\underline{F} = (\underline{T}'\underline{T})^{-1}\underline{T}'\underline{R} \quad (7)$$

Eqs. (4) through (6) only consider CTT of single spectral channel, if CTT from k infrared channels are considered, Eq. (6) can be extended as

$$\begin{aligned} R_m &= \sum_{i=1}^k w_i R_i(m) = \sum_{i=1}^k w_i \left(\sum_{j=1}^N T_{ij}(m) f_{ij} \right) \\ &= \sum_{i=1}^k \sum_{j=1}^N T_{ij}(m) (w_i f_{ij}) = \sum_{i=1}^k \sum_{j=1}^N T_{ij}(m) f'_{ij}, \quad m = 1, 2, \dots, n \end{aligned} \quad (8)$$

where R_m represents the multi-spectral spatial convolution estimate of the m -th pixel-average-rainfall. Previous researches suggested using CTT threshold of $253^\circ K$ for discrimination of rain and no-rain pixels (Griffith et al., 1978; Woodley et al., 1979; Negri and Adler, 1987; Adler and Negri, 1988). Therefore, effective temperatures (CTT minus $253^\circ K$) are used in the spatial convolution equation (Eqs. (6) and (8)). All cloud pixels with CTT higher than $253^\circ K$ correspond to zero effective temperatures, and therefore produce no rainfall. Also, readers are reminded that in order to achieve 3-hour-lead rainfall forecasting 3-hour-PAR (3-hour cumulative pixel-average-rainfall starting at time t) together with GMS CTT of time t must be used in Eqs. (6) and (8). The kernel function (F in Eq. (7) and f'_{ij} in Eq. (8)) is updated at every real-time step using the Kalman filtering algorithm by taking into account the rainfall prediction errors of the previous time step.

4. Results and discussions

4.1 1-hour-PAR accuracy assessment in model building

Block kriging estimates of 1-hour-PAR corresponding to 37 raingauges were compared against predicted 1-hour-PAR using GMS images by the MSSC approach. Figure 3 demonstrates that block kriging estimates and MSSC predictions of 1-hour-PAR are highly correlated and inclusion of more spectral channels yields better results. Figure 3 accounts for a total of 11,174 data points which correspond to PAR of 12 typhoon events with durations ranging from 10 to 57 hours.

4.2 Cross-validation of 1-hour and 3-hour-PAR forecast

Eqs. (6) and (8) which involve block kriging PAR estimates corresponding to available raingauges and the kernel function f , is solved by least-squared method. Accuracy assessment in subsection 4.1 is therefore analogue to comparison of measurements and their regression estimates. Such comparison generally only indicates good data-fitting and will not serve to demonstrate the accuracy of forecasts. In this study we adopted a cross-validation approach of accuracy assessment for 1-hour and 3-hour- PAR forecasts.

From a total of n block kriging PAR estimates, we first remove one PAR estimate, say corresponding to the first raingauge, and solve Eq. (6) or (8) for the kernel function f using the remaining $(n-1)$ PAR estimates. We then calculate the PAR forecast corresponding to the first raingauge. The same procedure is repeated again by replacing the removed PAR estimate with another one until all of the n PAR estimates have been chosen.

We conducted cross-validation for 1-hour and 3-hour-PAR forecasts (1-hour and 3-hour-lead forecasting) at pixels corresponding to individual raingauge sites for individual events. Figures 4 and 5 respectively show examples of cross validation for 1-hour and 3-hour-PAR forecasts corresponding to four raingauges (Guandu, Chung-Cheng Bridge, Dabao and Gauyi) during Typhoon Winnie occurred in 1997. It can be seen clearly that MSSC forecasts of 1-hour and 3-hour-PAR forecasts are compatible with block kriging estimates.

In addition to cross-validation, the 3-hour-PAR forecasts are also compared with forecasts by simple persistence (i.e. assuming that rainfall amount from the previous 3 hours will fall again during the next 3 hours). Even though data from many typhoons and raingauges were used in our study, we only show comparisons between 3-hour-PAR forecasts (by spatial convolution and simple persistence methods) and block-kriging PAR (which are considered as observed rainfall) for Chung-Cheng Bridge and Gauyi stations during Typhoon Winnie. As can be seen in Figure 6, forecasts by spatial convolution tend to follow the variation trend of block-kriging PAR. Root mean square errors of the spatial convolution method are 24.6 mm and 20.4 mm for Chung-Cheng Bridge and Gauyi stations, respectively. As can be expected, the simple persistence forecasts follow the variation trend very well, however, it cannot yield forecasts at locations where no raingauge stations exist. In contrast, the proposed spatial convolution approach solves for the kernel function and then extends forecasts to large cloud-covered area with no raingauge stations.

5. Conclusions

We have developed a multi-spectral spatial convolution approach for real-time rainfall forecasting using geostationary weather satellite images. The approach incorporates cloud-top temperatures of three infrared channels in a spatial convolution context. It not only characterizes the input-output relationship of cloud-top temperature and rainfall on the ground level but also is more consistent with physical and remote sensing principles than single-pixel matches. Through cross-validation, the MSSC demonstrates its capability of achieving high accuracy for 1-hour to 3-hour-lead pixel-average-rainfall forecasting.

Acknowledgements

The authors are thankful to Dr. T.K. Chiu of Central Weather Bureau for offering comments and suggestions. We are also grateful for support by the Council of Agriculture and staff of the Soil and Water Conservation Bureau, especially the section chief Mr. J.L. Wang. and Mr. C.S. Yen.

References

- Adler, R.F. and Negri, A.J. A satellite infrared technique to estimate tropical convective and stratiform rainfall. *Journal of Applied Meteorology*, 27: 30-51, 1988.
- Ba, M.B. and Nicholson, S.E. Analysis of convective activity and its relationship to the rainfall over the Rift Valley Lakes of east Africa during 1983-90 using METEOSAT infrared channel. *Journal of Applied Meteorology*, 37: 1250-1264, 1998.
- Ba, M.B. and Gruber, A. GOES multispectral rainfall algorithm (GMSRA). *Journal of Applied*

- Meteorology, 40:1500-1514, 2001.
- Berg, W., Bates, J.J. and Jackson, D.L. Analysis of upper-tropospheric water vapor brightness temperatures from SSM/T2, HIRS, and GMS-5 VISSR. *Journal of Applied Meteorology*, 38: 580-595, 1999.
- Chilès, J.P. and Delfiner, P. *Geostatistics - Modeling Spatial Uncertainty*. John Wiley and Sons, Inc., New York, 449-451, 1999.
- Conway, E.D. *An Introduction to Satellite Image Interpretation*. The Johns Hopkins University Press, 1997.
- D'souza, G., Barrett, E.C. and Power, C.H. Satellite rainfall estimation techniques using visible and infrared imagery. *Remote Sensing Reviews*, 4(2): 379-414, 1990.
- Ferreira, F., Amayenc, P., Oury, S., et al. Study and tests of improved rain from the TRMM precipitation radar, *Journal of Applied Meteorology*, 40: 1878-1899, 2001.
- Griffith, C.G., Woodley, W.L., Grube, P.G., et al. Rain estimation from geosynchronous satellite imagery-visible and near Infrared studies. *Monthly Weather Reviews*, 106: 1153-1171, 1978.
- Journel, A.G., and Huijbregts, C.J. *Mining Geostatistics*. Academic Press, London, 1978.
- Kazumasa, A. and Liu, G. Passive microwave precipitation retrievals using TMI during the Baiu period of 1998. Part I: algorithm description and validation. *Journal of Applied Meteorology*, 39: 2024-2037, 2000.
- Kummerow, C. and Giglio, L. A method for combining passive microwave and infrared rainfall observations. *Journal of Atmospheric and Oceanic Technology*, 12: 33-45, 1995.
- Martin, D.W., Goodman, B., Schmit, T.J., et al. Estimates of daily rainfall over the Amazon basin. *Journal of Geophysical Research*, 95(D10): 17043-17050, 1990.
- Miller S.W., Arkin, P.A. and Joyce, R.A. Combined microwave/infrared rain rate algorithm. *International Journal of Remote Sensing*, 22(17): 3285-3307, 2001.
- Mishra J.K., and Sharma, O.P. Cloud top temperature based precipitation intensity estimation using INSAT-1D data. *International Journal of Remote Sensing*, 22(6): 969-985, 2001.
- Negri, A.J. and Adler, R.F. Infrared and visible satellite rain estimation Part I: a grid cell approach. *Journal of Climate and Applied Meteorology*, 26: 1553-1564, 1987.
- Prabhakara, C., Iacovazzi, Jr. R., Weinman, J.A., et al. A TRMM microwave radiometer rain rate estimation method with convective and stratiform discrimination. *Journal of the Meteorological Society of Japan*, 78(3): 241-258, 2000.
- Scofield R.A. The NESDIS operational convective precipitation estimation technique. *Monthly Weather Review*, 115: 1773-1792, 1987.
- Sorooshian, S., Hsu, K.L., Gao, X. et al. Evaluation of PERSIANN system satellite-based estimates of tropical rainfall. *Bulletin of the American Meteorological Society*, 81(9), 2035-2046, 2000.
- Todd, M.C., Kidd, C., Kniveton, D., et al. A combined infrared and passive microwave technique for estimation of small-scale rainfall. *Journal of Atmospheric and Oceanic Technology*, 18(5): 742-755, 2001.
- Toshiaki, K., Kawanishi, T., Kuroiwa, H., et al. Development of precipitation radar onboard the tropical rainfall measuring mission (TRMM) satellite. *IEEE Transactions on Geoscience and Remote Sensing*, 39(1): 102-116, 2001.
- Turk, F.J., Marzano, F.S., Smith, E.A., et al. Using coincident SSM/I and infrared geostationary satellite data for rapid updates of rainfall. *Geoscience and Remote Sensing Symposium Proceedings, IGARSS'98*, 150-152, 1998.
- Woodley, W.L., Griffith, C.G., Griffin, J.S., et al. The inference of GATE convective rainfall from SMS-1 imagery. *Journal of Applied Meteorology*, 19: 388-408, 1979.
- Xu, L., Gao, X., Sorooshian, S., et al. A microwave infrared threshold technique to improve the GOES precipitation index. *Journal of Applied Meteorology*, 38: 569-579, 1999.

Table 1. Duration of typhoon events used in this study.

Name	Nominal date	Duration (hours)
Winnie	19/08/1997	18
Amber	29/08/1997	24
Zeb	15/10/1998	35
Babs	25/10/1998	48
Yanni	26/09/1998	57
Maggie	08/06/1999	10
Dan	03/10/1999	16
Kaitak	09/07/2000	20
Bilis	22/08/2000	25
Prapiroon	28/08/2000	28
Bopha	09/09/2000	21
Xangsane	31/10/2000	41

Table 2. Spectral range and spatial resolution of GMS images.

Channel	Spectral range (μm)	Spatial resolution (km)	Related Information
IR1	10.5 – 11.5	5	Cloud-top temperature
IR2	11.5 – 12.5	5	Cloud-top temperature
IR3	6.5 – 7.0	5	Water vapor
PAN	0.55 – 0.90	1.25	Albedo

Figure captions

Figure 1. The study area and raingauge locations.

Figure 2. Processes of radiances received at sensor and rainfall reaching ground surface.

Figure 3. Comparison of block kriging estimates and MSSC predictions of 1-hour-PAR using various numbers of spectral channels. (Model building)

Figure 4. Cross-validation of 1-hour-PAR forecasts during Typhoon Winnie using IR1, IR2 and IR3 channels.

Figure 5. Cross-validation of 3-hour-PAR forecasts during Typhoon Winnie using IR1, IR2 and IR3 channels.

Figure 6. Comparison of 3-hour-PAR forecasts by spatial convolution, simple persistence and block-kriging PAR during Typhoon Winnie at Chung-Cheng Bridge and Gauyi raingauge stations.

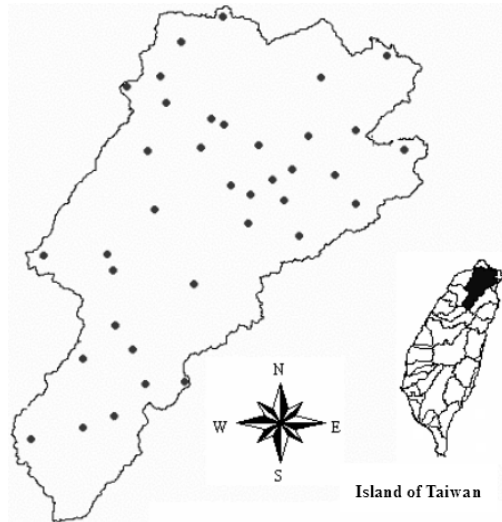


Figure 1. The study area and rain gauge locations.

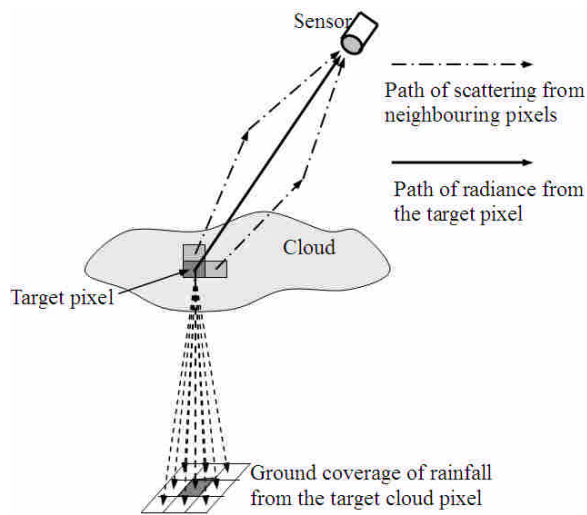


Figure 2. Processes of radiances received at sensor and rainfall reaching ground surface.





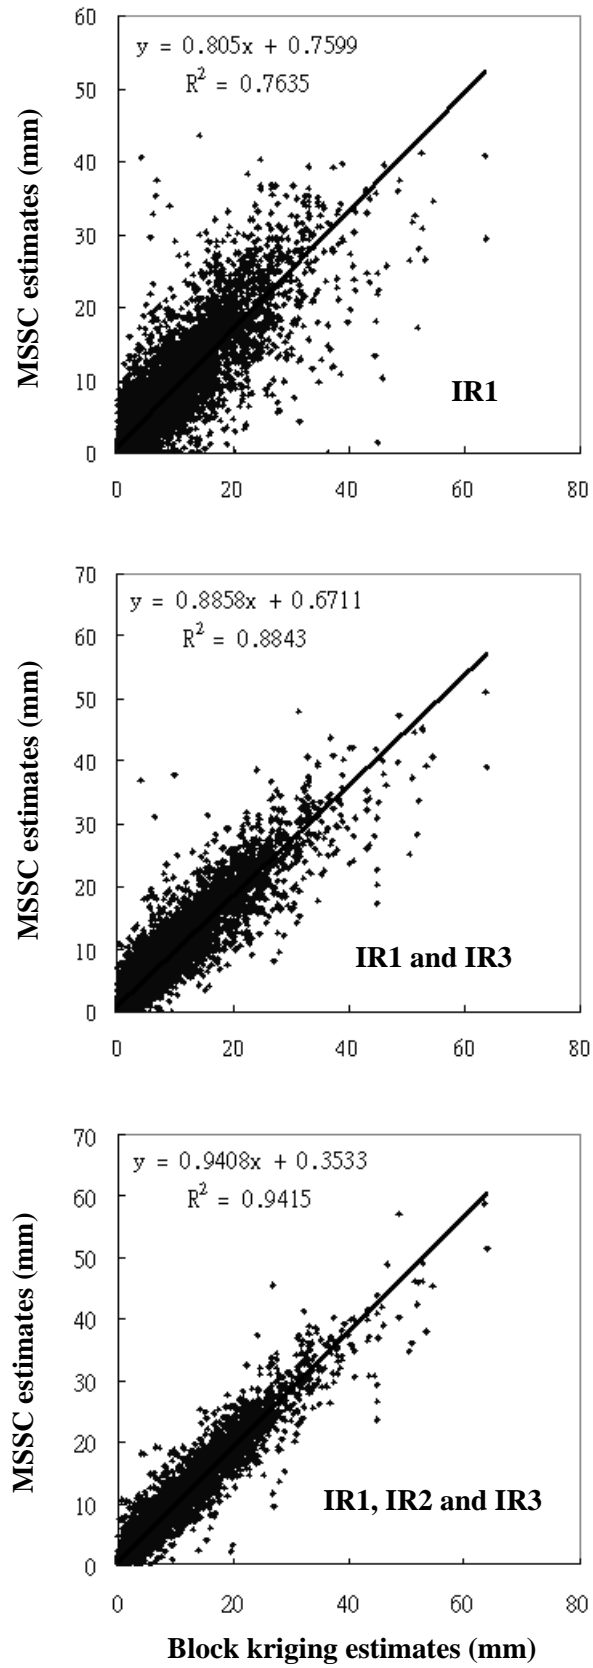


Figure 3. Comparison of block kriging estimates and MSSC predictions of 1-hour-PAR using various numbers of spectral channels. (Model building)

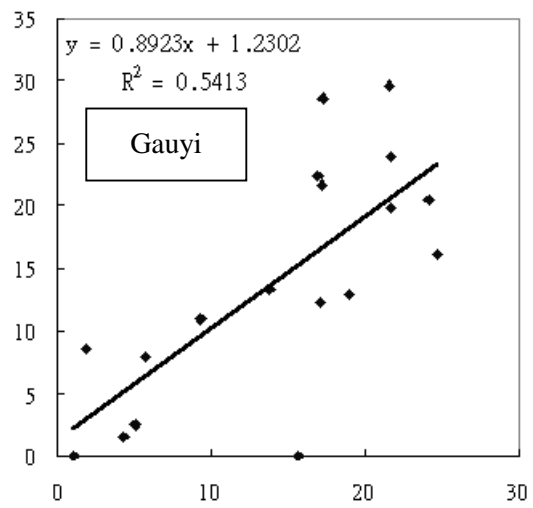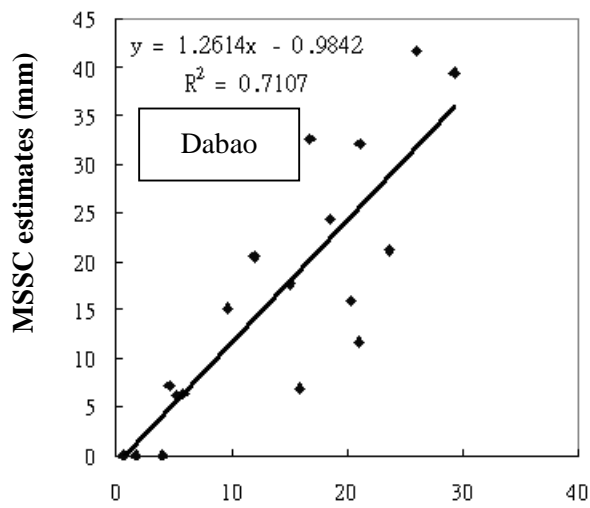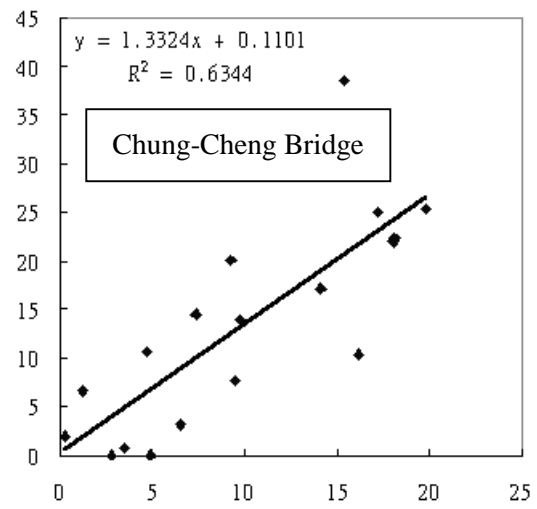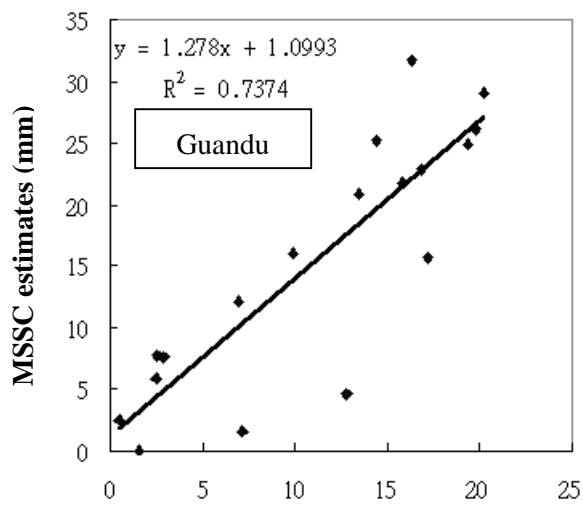

Block kriging estimates (mm)

Block kriging estimates (mm)

Figure 4. Cross-validation of 1-hour-PAR forecasts during Typhoon Winnie using IR1, IR2 and IR3 channels.

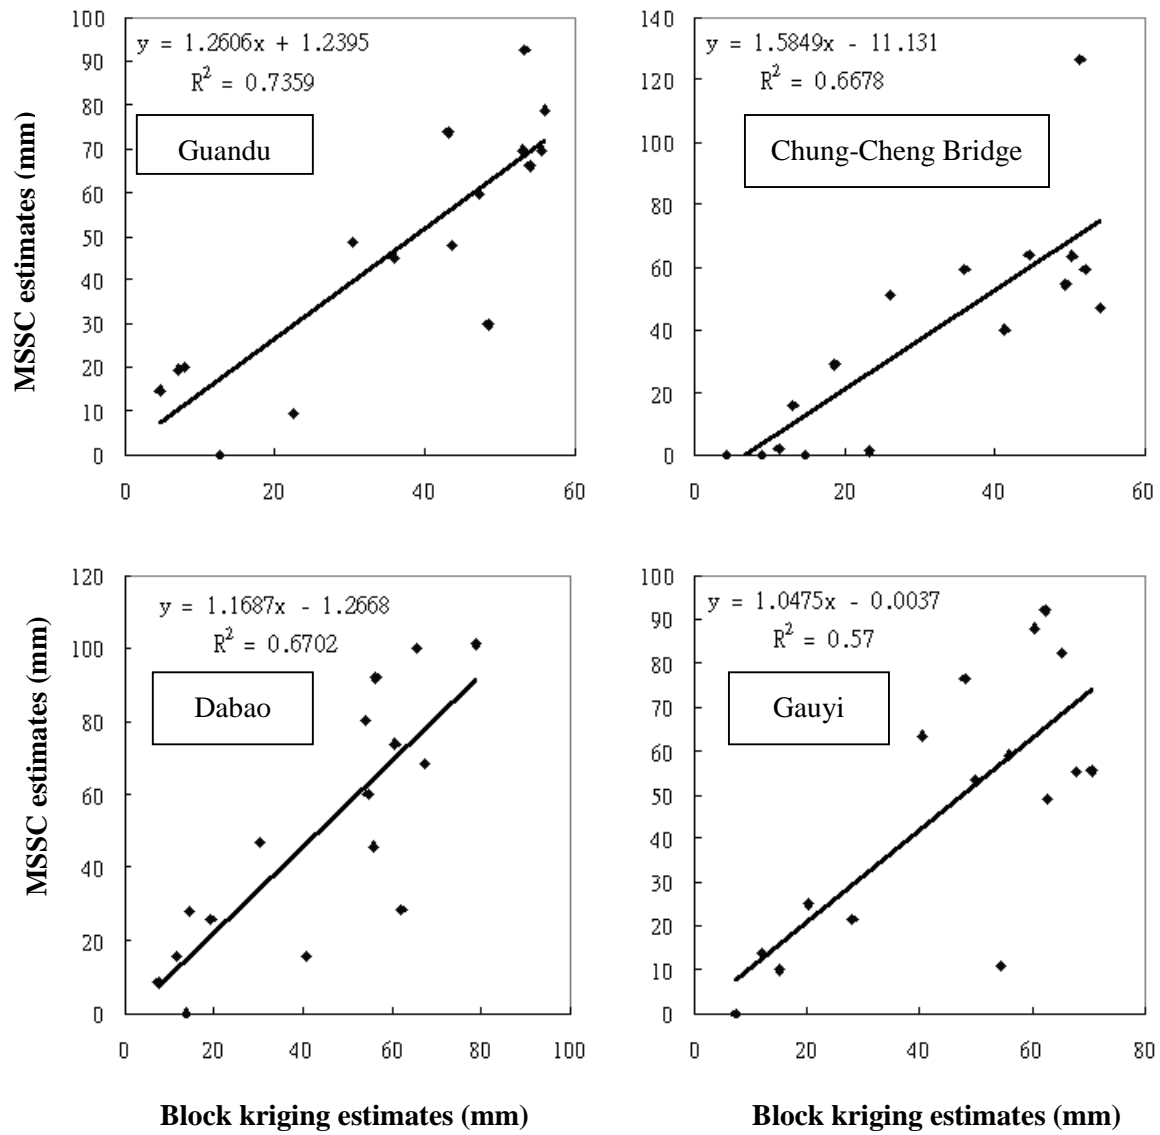


Figure 5. Cross-validation of 3-hour-PAR forecasts during Typhoon Winnie using IR1, IR2 and IR3 channels.

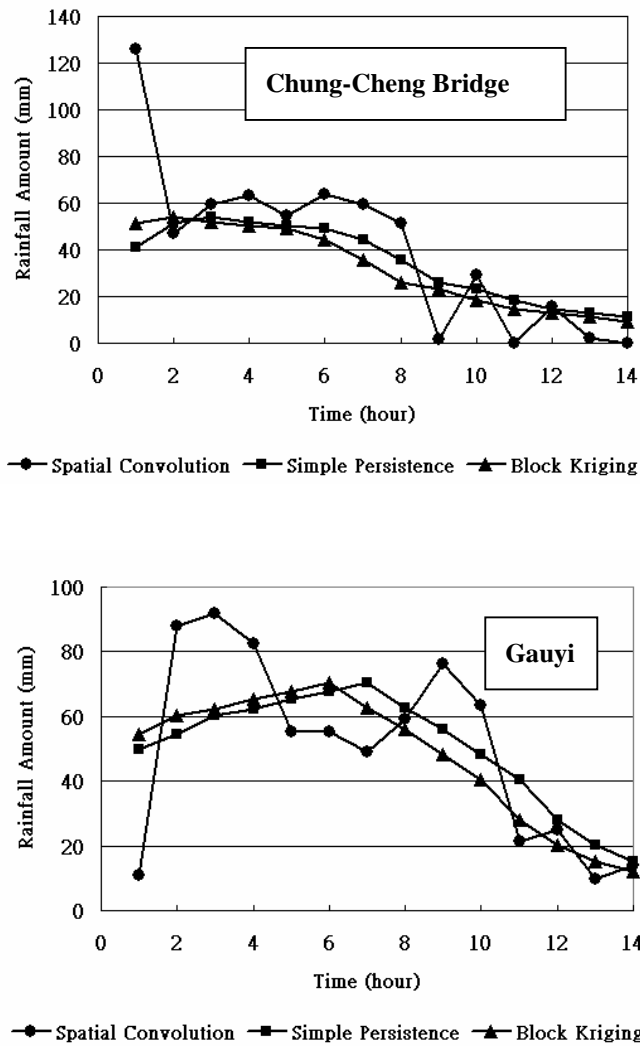


Figure 6. Comparison of 3-hour-lead PAR forecasts by spatial convolution, simple persistence and block-kriging PAR during Typhoon Winnie at Chung-Cheng Bridge and Gauyi rain gauge stations.